


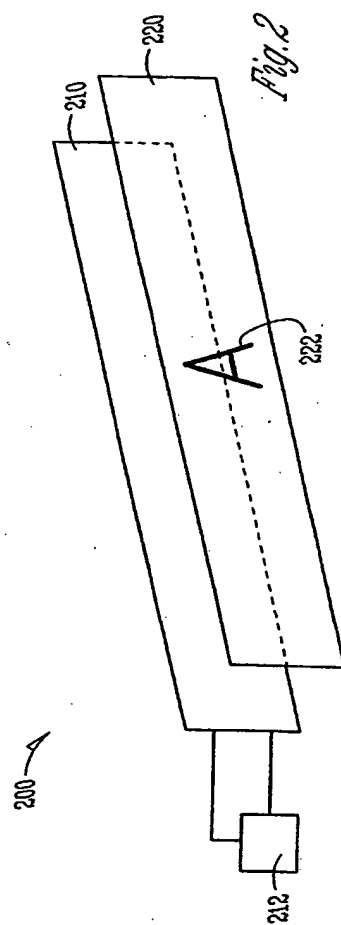
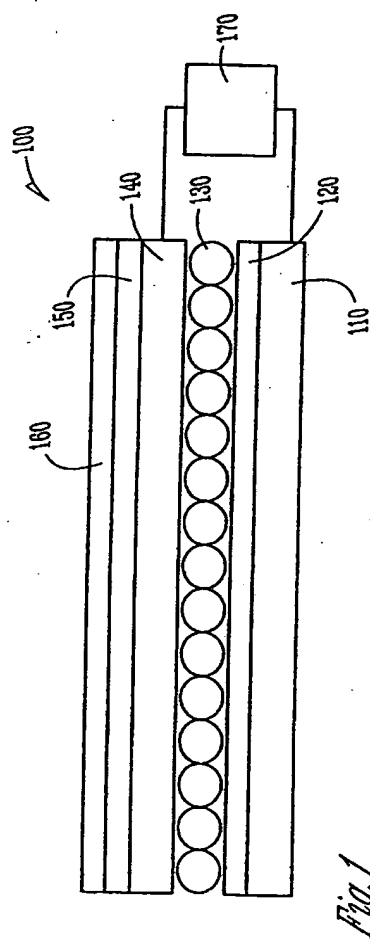


1/12





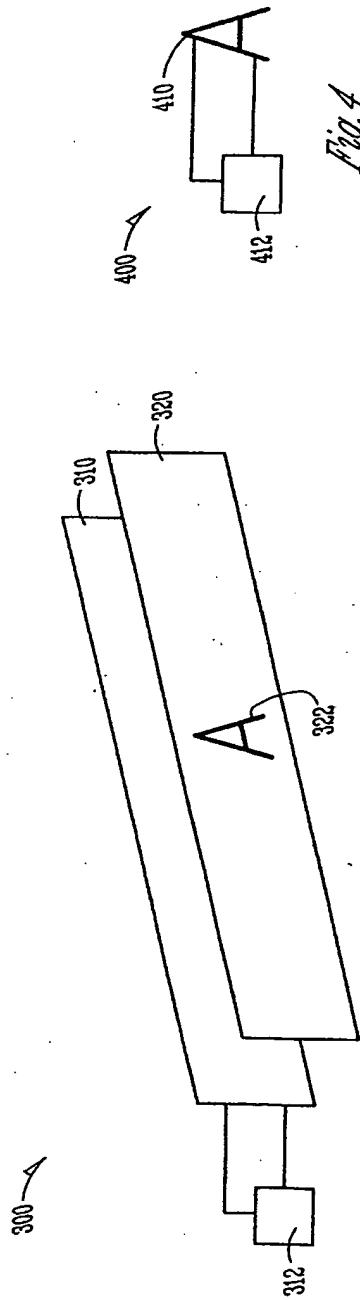

2/12

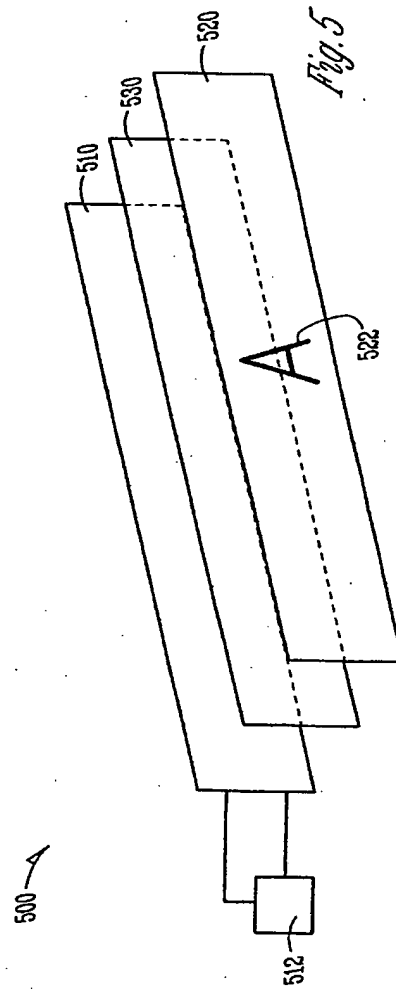

3/1/12

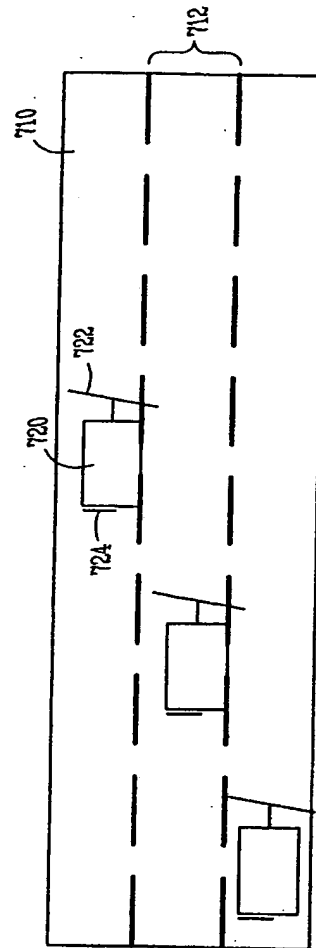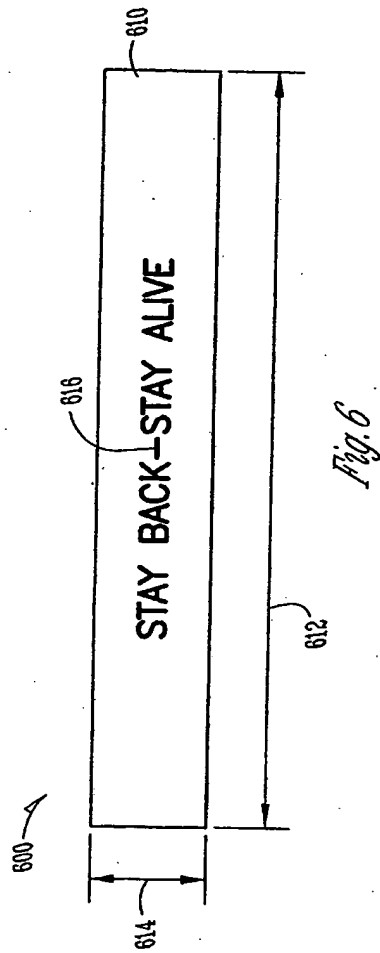

4/12

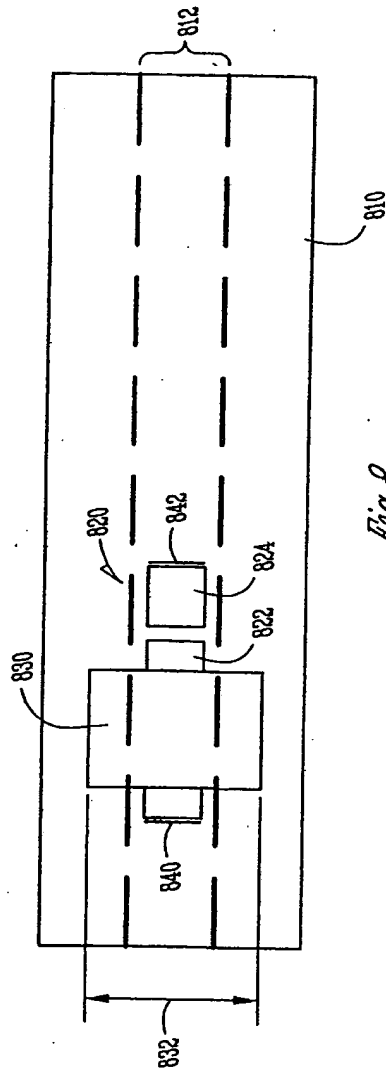


Fig. 8

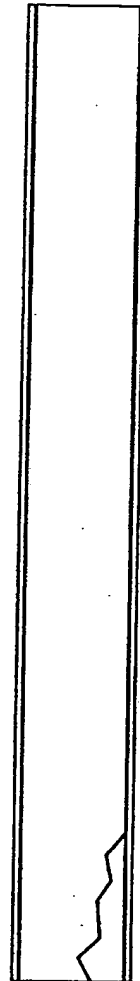


Fig. 9

5/ 12

Stay Back Stay Alive Sign

Lamp Baseline Assumptions:

- Lamp Size: 8.5" x 72"
- Construction: Hybrid
- Lit Color: Yellow has a yellow on/off color
- Interconnection: Crimp with Wires
- ITO Substrate Thickness: 0.007" (0.178mm)
- Nominal Lamp Thickness: 0.015" (0.38mm)
- Part Label: On packaging
- Adhesive: None
- Insulator: 0.0015" tape (a thicker laminate may be required for durability)
- Overprint: TBD

Power Supply Specs

| | |
|--------|--|
| Driver | 2-Amp or 5-Amp driver (120Vrm/60Hz input » 140Vrms/600Hz output) |
|--------|--|

Fig. 10

7/12

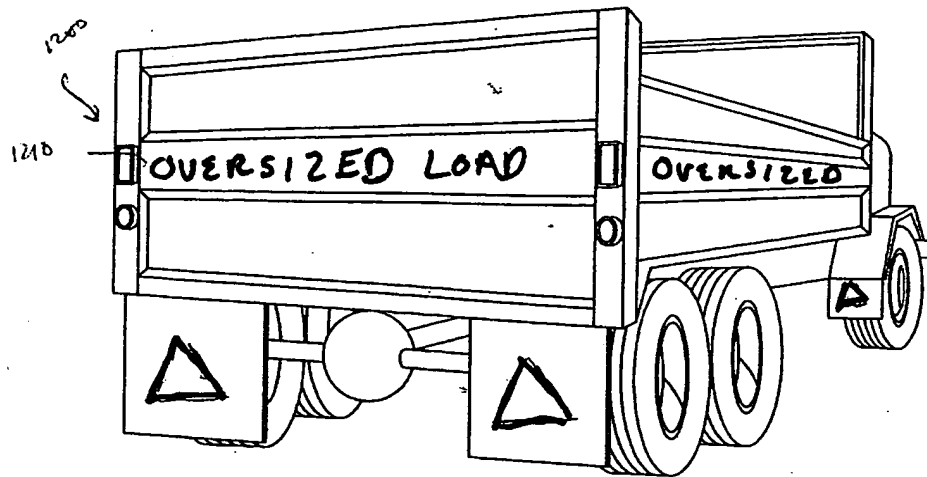


FIG. 12

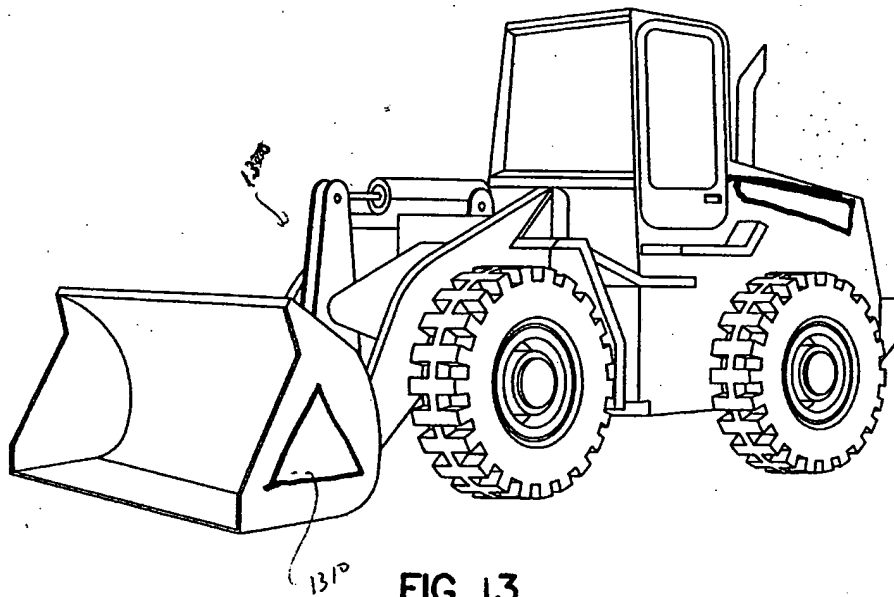


FIG. 13

7/12

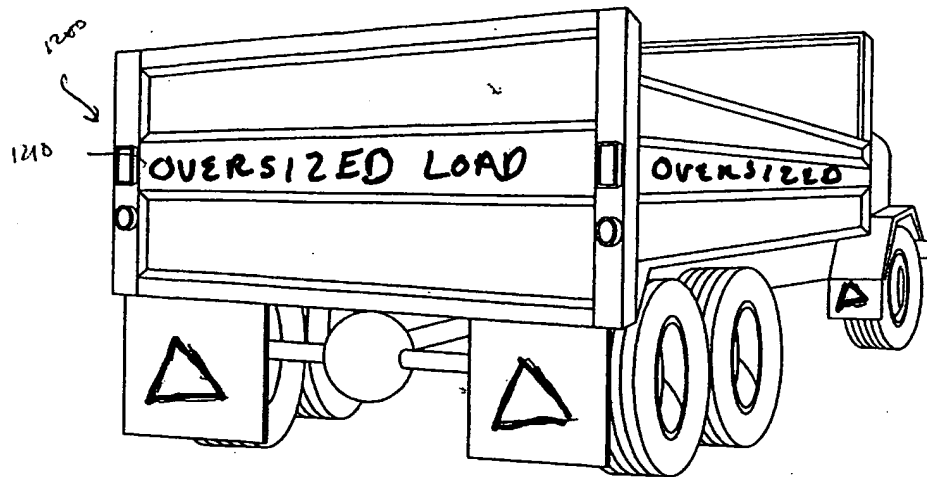


FIG. 12


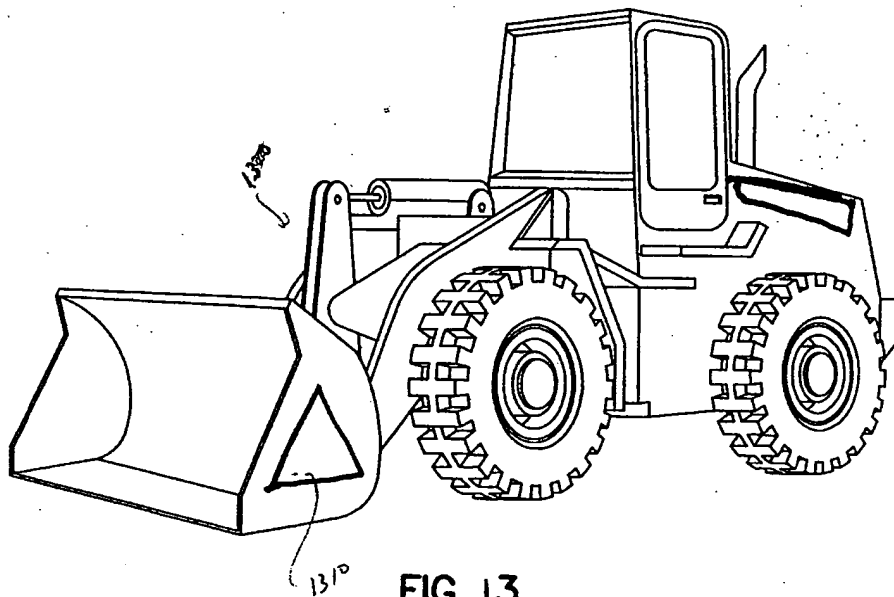


FIG. 13

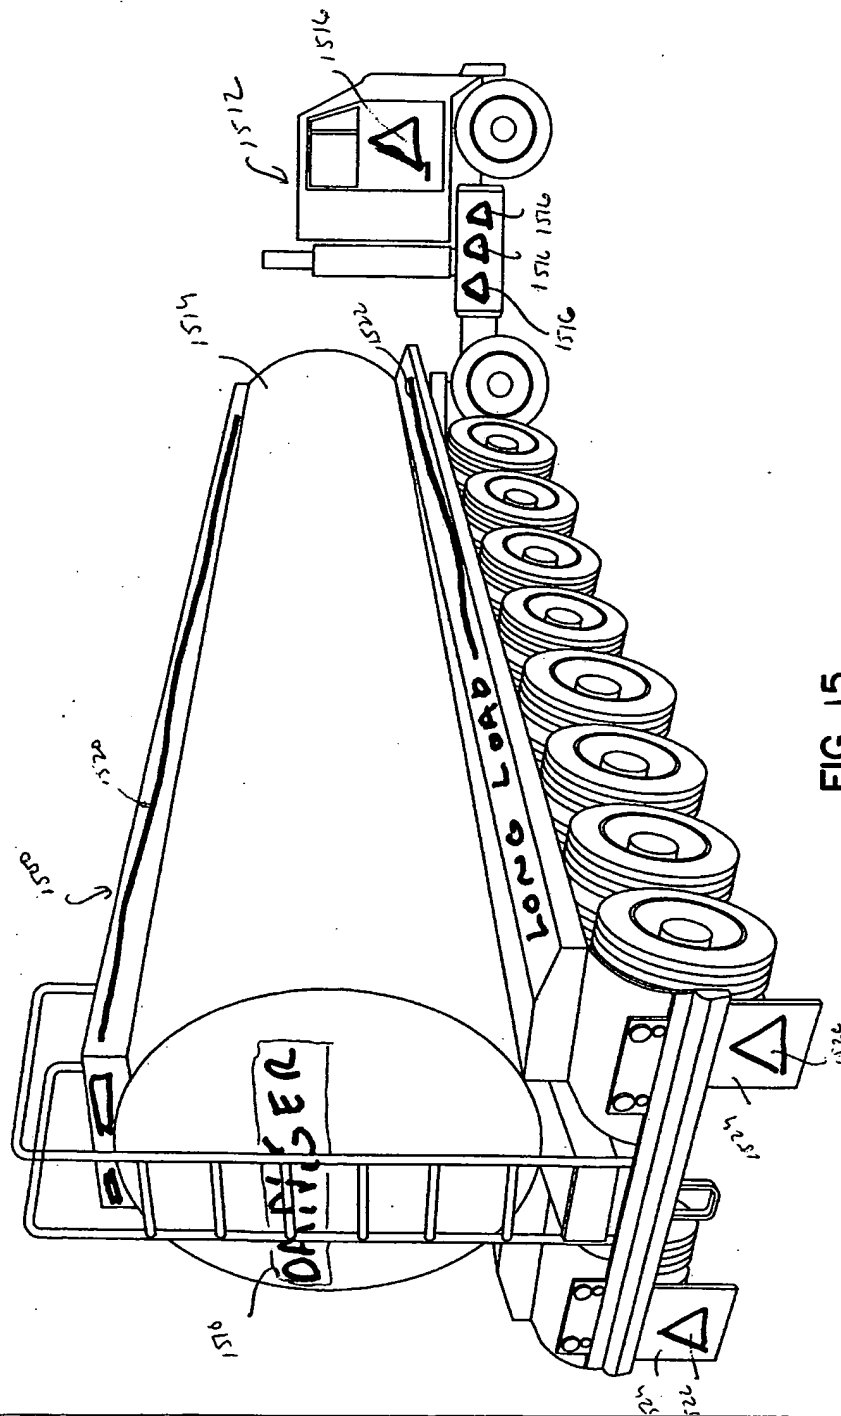

10/12

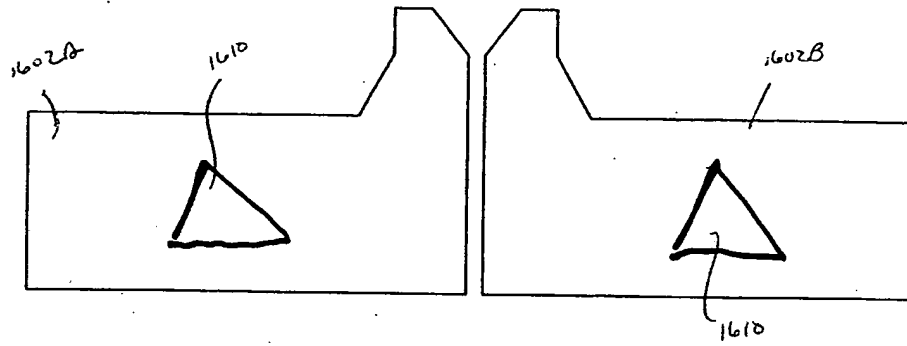


FIG. 16A

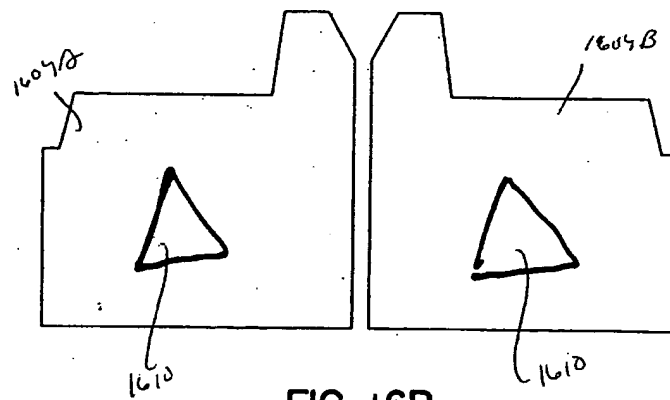


FIG. 16B

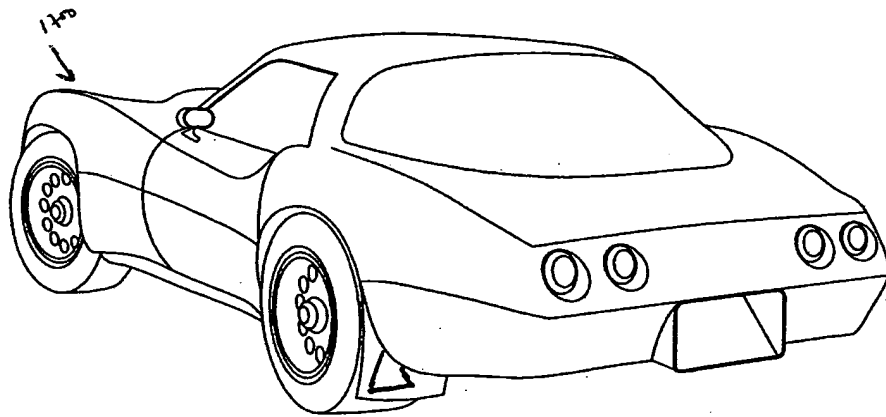


FIG. 17

12/12

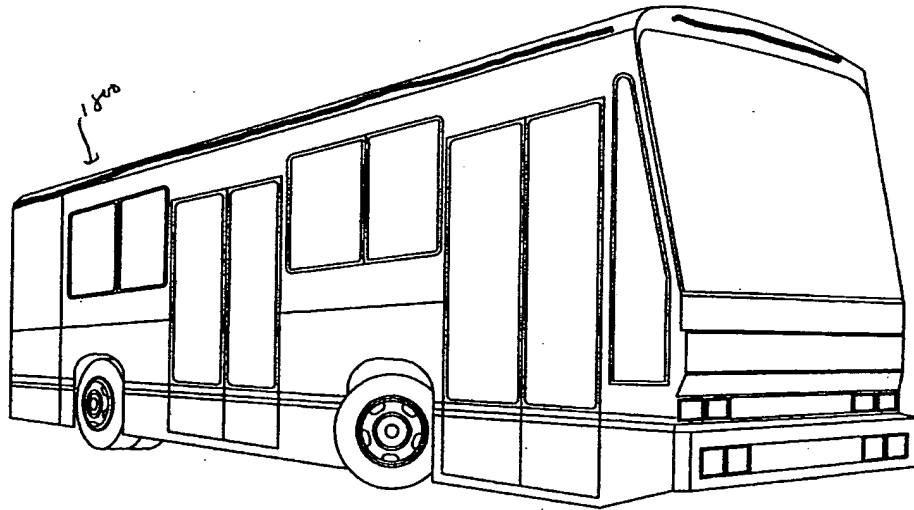


FIG. 18

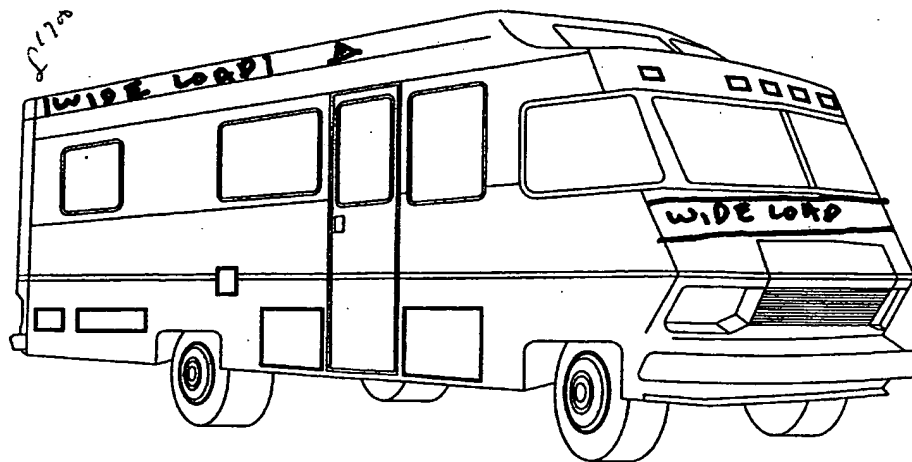


FIG. 19